


ECO LED Module for advertising lighting box

Part No.:GMFT6612-3W2835

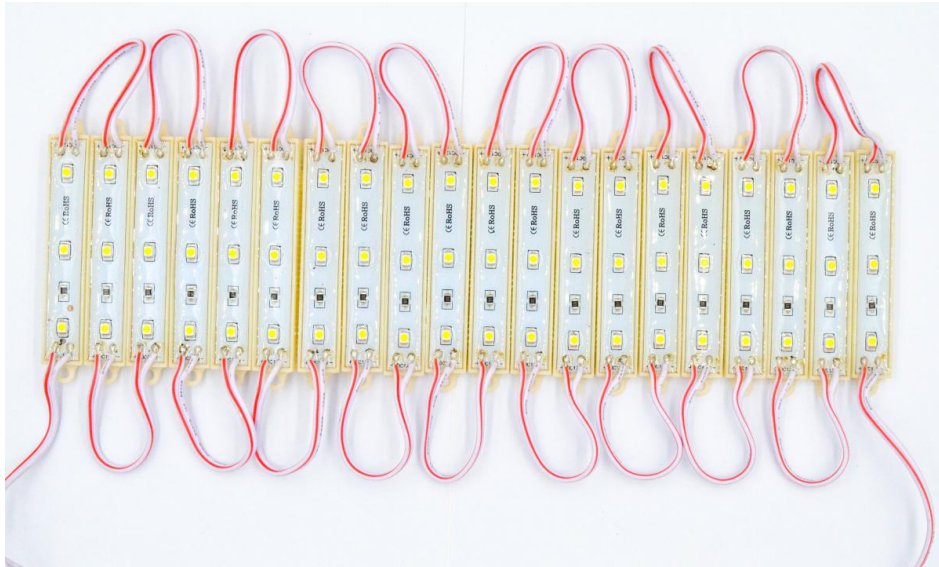

◆ Features

- ✧ Take 2835 LED as light source, make the color uniform, good consistency;
- ✧ Epoxy led module. It is very traditional and stable.
- ✧ High efficiency chip, high brightness and reliability
- ✧ Long life span
- ✧ DC12V Low voltage input. Constant voltage design. environment friendly
- ✧ 20pcs modules a string. Using a series-parallel mixed design. You can cut at random module.

◆ Applications

Widely used in 8 ~ 30 cm the thickness of the advertising lighting box



◆ Parameters

| Part No. | Led Type | Led Color | CCT | Luminous | CRI | Working Voltage | Power | Viewing Angle |
|-----------------|----------|-----------|-------|----------|-------|-----------------|-------|---------------|
| GMFT6612-3W2835 | 2835 | white | 7500k | 72 | RA>80 | DC12V | 0.72W | 120 |

◆ Dimensions (mm)

◆ Lighting Distribution Curve

◆ Package information:

Factory Add: Floor 5,Yushan Industrail Park C Building,Songbai Road No.2079, Shiyao Town,Bao'an,Shenzhen,China
 Tel/Fax:+86-755-27655320; Website: www.heyday-led.com; E-mail: cathy@heyday-led.com;
 Mobile: +86 134 1074 1216; Watsapp:+86 134 1074 1216; Contact Person: Cathy Zhang

20pcs modules per chain; 5chains per anti-static bag; 20bags per carton; Total 2000pcs in one carton.

Carton size; 46*27.5*28.5cm; N.W: 12.2±5%Kg; G.W: 13.2±10%Kg



◆ **Attentions**

- ✧ Maximum number of the modules per chain is 20 pcs if power to single end.
- ✧ The parameters may change as the material of lighting box or channel letters.
- ✧ The Led modules including its relate components can't be mechanically pressed.
- ✧ Please make sure the power supply is enough to operate the total load.
- ✧ Only professionals can tear down, install or maintain LED modules.
- ✧ All of tools used for installation need meet anti-flame rules.
- ✧ Power supply should have short circuit and over load protection.and total power should be less than rated power 80% of that power.
- ✧ Working temperature: -25~55℃.